

### DRIVER AND EVENT DETAILS

Name KIRBY MASTERMAN  
 Date 22/02/09  
 Event TITC 2009  
 Weather Hot...  
 Result @ 8<sup>th</sup> Bmain - finish 3<sup>rd</sup>

### TRACK CONDITIONS

Grip Level  High  Medium  Low   
 Track Type  Tight  Open  Both   
 Surface  Carpet  Tarmac  Wood   
 Venue  Indoor  Outdoor   
 Track Condition  Smooth  Bumpy   
 Track Temperature  °C  °F



### DRIVER NOTES

1mm ~~spacer~~ spacer Rear  
 0.5mm spacer front  
 standard arms not flex.  
 smaller bumper.

hex  
hex

### CHASSIS AND ELECTRICS

Chassis Scell 2008  
 Top Deck Standard   
 Bodyshell LTC-R proform  
 Wing   
 E.S.C LRP  
 Servo Futaba S9551  
 Receiver Futaba 2.4ghz  
 Number of Cells  4  5  6   
 Type of Cells XVS 4600 EnerG

### MOTOR AND GEARING

Type  Brushed  Brushless   
 Motor GM 6.0  
 Brush   
 Spring   
 Timing   
 Gear Pitch  48Dp  64Dp   
 Spur Size 114  
 Pinion Size 30


### WHEELS, TYRES AND INSERTS

Wheels   
 Tyres Sweep 40 ~~40~~  
 Inserts   
 Tyre Additive FxII + Buggy Grip  
 Additive Time 30 MIN (R) 30 MIN (F)  
 Tyre Warmers  Yes  No

### FRONT SETTINGS

Drive  Diff  Spool  One-Way  Height  High  Low

Servo Saver  Yes  No   
 Toe In-Out  In-board  Out-board  1° Toe-out  
 Screw Block Spacers Front 1 mm Rear 1 mm  
 Wishbone Quik-Klips Front 2 mm Rear 2 mm  
 Link Washers (Horizontal) 3.5 mm  
 Ride Height (Chassis to Floor) 4.5 mm  
 Droop (Chassis to Floor) 6 mm  
 Anti-roll Bar  Yes  No   1.20  1.40  1.60   
 Castor  0°  2°  4°  6°   
 Camber  Positive  Negative  1.5 Deg  
 Link Washers (Vertical) 0.5 mm  
 Inboard Pin  Kick-up  Anti-dive  Horizontal   
 Pivot Block Spacers Front 1.5 mm Rear 1.5 mm

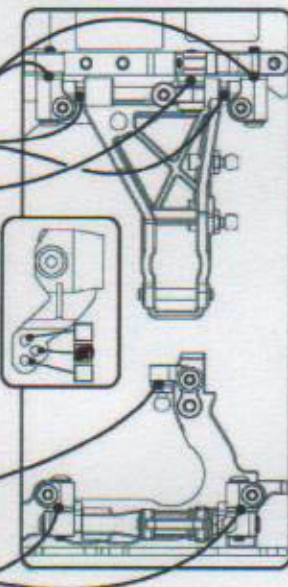


### Front Shocks

Oil 60 WT  
 Springs Pink  
 Piston Holes  2  3   
 length 61  
 Rebound 70 %

HP1





### Centre Track Rod

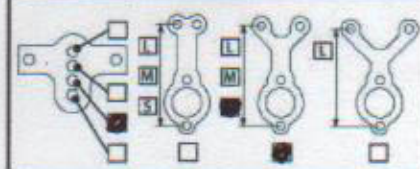

### REAR SETTINGS

Drive Height  High  Low

Toe In  In-board  Out-board  3°  
 Screw Block Spacers Front 2 mm Rear 1 mm  
 Wishbone Quik-Klips Front 2 mm Rear 2 mm  
 Link Washers (Horizontal) 3 mm  
 Ride Height (Chassis to Floor) 5 mm  
 Droop (Chassis to Floor) 5 mm  
 Anti-roll Bar  Yes  No   1.20  1.40  1.60   
 Camber  Positive  Negative  1.5 Deg  
 Link Washers (Vertical) 1 mm  
 Inboard Pin  Pro-Squat  Anti-Squat  Horizontal   
 Pivot Block Spacers Front 2 mm Rear 2 mm

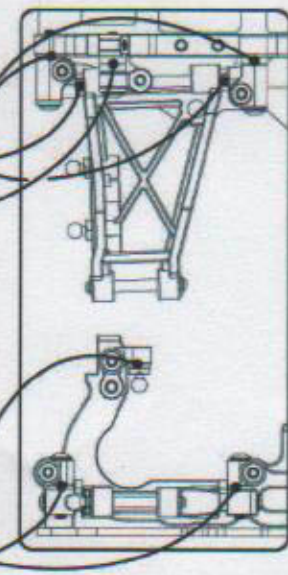

### Rear Shocks

Oil 50 WT  
 Springs Silver  
 Piston Holes  2  3   
 length 62  
 Rebound 70 %

HP1

### Driver Notes

