

DRIVER AND EVENT DETAILS

Name **CHRIS ASHTON**
 Date **OCT 09**
 Event **CARPET TEST**
 Weather
 Result

CHASSIS AND ELECTRICS

Chassis **2.5**
 Top Deck **2.0**
 Bodyshell **EAST COAST SPEED 6**
 Wing **190mm**
 E.S.C **GM 120**
 Servo **SANWA SDX 801**
 Receiver **KO**
 Cells **GM 5000 35C LIPO**

TRACK CONDITIONS

Grip Level High Medium Low
 Type Tight Open Both
 Surface Carpet Tarmac Wood
 Condition Smooth Bumpy
 Temperature **20 °C** °F
 Venue Indoor Outdoor



MOTOR AND GEARING

Motor **GM 10.5T**
 Rotor Diameter **Std**
 Timing
 Gear Pitch **48Dp** **64Dp**
 Spur Size **114T**
 Pinion Size **28T**

Transmission

Option 1 Option 2

WHEELS, TYRES AND INSERTS

Wheels
 Tyres **SOREX 28 JB**
 Inserts
 Tyre Additive **NOSRAM CARPET**
 Additive Time **20 MIN (R) 10 MIN (F)**
 Tyre Warmers Yes No

DRIVER NOTES

Narrow Front Hex U3570

FRONT SETTINGS

Drive Diff Spool One-Way Height High Low

Servo Saver Yes No Yoke Flex X M STD

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front **2.5 mm** Rear **2.5 mm**

Wishbone Quik-Klips Front **2.5 mm** Rear **1.5 mm**

Toe In-Out In-board Out-board **-1 °**

Ride Height (Chassis to Floor) **4.5 mm**

Droop On 10mm Block Axle Height **5.5 mm**

Anti-roll Bar No **1.20** **1.40** **1.60**


Castor **0°** **2°** **4°** **6°**

Camber Positive Negative **1.5 Deg**



Link Washers Under Ball Under Bracket **1 mm**

Inboard Pin Kick-up Anti-dive Horizontal

Pivot Block Spacers Front mm Rear mm



Wishbone Flex CF M



Front Shocks


Oil **50 WT**

Springs **Sch Blue**


Piston Holes **2** **3**

length **12.60**

Rebound **100 %**




Centre Track Rod

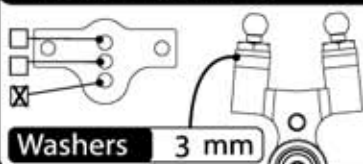

Washers **3 mm**

Link Mount

1 Groove
 2 Groove
 3 Groove



REAR SETTINGS

Drive Height High Low

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front **1.0 mm** Rear **1.0 mm**

Wishbone Quik-Klips Front **2.0 mm** Rear **2.0 mm**

Toe In In-board **3 °** Out-board

Ride Height (Chassis to Floor) **5.0 mm**

Droop On 10mm Block Axle Height **4.5 mm**


Anti-roll Bar No **1.20** **1.40** **1.60**

Camber Positive Negative **1.5 Deg**


Link Washers Under Ball Under Bracket **0 mm**

Inboard Pin Pro-Squat Anti-Squat Horizontal

Pivot Block Spacers Front mm Rear mm




Wishbone Flex CF M




Link Mount

1 Groove
 2 Groove
 3 Groove



1.4mm
 2.4mm
 3.4mm
 4.4mm



Rear Shocks

Oil **50 WT**

Springs **Sch White**

Piston Holes **2** **3**

length **12.60**

Rebound **100 %**