

**DRIVER AND EVENT DETAILS**

Name CHRIS GRAINGER  
 Date 13/09/2009  
 Event BRCA MENDIP  
 Weather FINE  
 Result TQ AND A FINAL 1ST

**TRACK CONDITIONS**

Grip Level High  Medium  Low   
 Type Tight  Open  Both   
 Surface Carpet  Tarmac  Wood   
 Condition Smooth  Bumpy   
 Temperature 20 °C °F  
 Venue Indoor  Outdoor

**CHASSIS AND ELECTRICS**

Chassis 2.00  
 Top Deck 2.00  
 Bodyshell PF MAZDA SPEED 6  
 Wing STD  
 E.S.C GM 120  
 Servo KO  
 Receiver KO  
 Cells GM 5000 35C LIPO

**MOTOR AND GEARING**

Motor GM 6.5T  
 Rotor Diameter 12.5  
 Timing  
 Gear Pitch 48Dp  64Dp   
 Spur Size 89T  
 Pinion Size

**Transmission**

Option 1  Option 2

**WHEELS, TYRES AND INSERTS**

Wheels  
 Tyres SOREX 32 BRCA  
 Inserts  
 Tyre Additive MR  
 Additive Time 30 MIN (R) 30 MIN (F)  
 Tyre Warmers Yes  No

**DRIVER NOTES**

Narrow Front Hex U3570

**Front Shocks**

Oil 45 WT  
 Springs Sch Blue  
 Piston Holes 2  3   
 length 12.60  
 Rebound 100 %

**FRONT SETTINGS**

Drive Diff  Spool  One-Way  Height High  Low

Servo Saver Yes  No  Yoke Flex X  M  STD

Pivot Blocks Moulded (std)  Alloy

Screw Block Spacers Front 2.5 mm Rear 2.5 mm

Wishbone Quik-Klips Front 2.5 mm Rear 1.5 mm

Toe In-Out In-board  Out-board  -1 °

Ride Height (Chassis to Floor) 5.5 mm

Droop On 10mm Block  Axle Height  5.0 mm

Anti-roll Bar No  1.20  1.40  1.60


Castor 0°  2°  4°  6°

Camber Positive  Negative  2 Deg




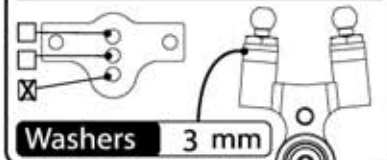
Link Washers Under Ball  Under Bracket  1 mm

Inboard Pin Kick-up  Anti-dive  Horizontal


Pivot Block Spacers Front mm Rear mm



Wishbone Flex CF  M

**Centre Track Rod****Link Mount**

1 Groove   
 2 Groove   
 3 Groove

**REAR SETTINGS**

Drive Height High  Low

Pivot Blocks Moulded (std)  Alloy

Screw Block Spacers Front 1.0 mm Rear 1.0 mm

Wishbone Quik-Klips Front 2.0 mm Rear 2.0 mm

Toe In In-board  3° Out-board

Ride Height (Chassis to Floor) 5.8 mm

Droop On 10mm Block  Axle Height  4.0 mm


Anti-roll Bar No  1.20  1.40  1.60

Camber Positive  Negative  2.0 Deg


Link Washers Under Ball  Under Bracket  0 mm

Inboard Pin Pro-Squat  Anti-Squat  Horizontal




Pivot Block Spacers Front mm Rear mm



Wishbone Flex CF  M

**Link Mount**

1 Groove   
 2 Groove   
 3 Groove

**Rear Shocks**

Oil 45 WT  
 Springs Sch White  
 Piston Holes 2  3   
 length 12.60  
 Rebound 100 %