Setup Sheet

DRIVER DETAILS

NAME	Andy Murray
DATE	12/11/2016
EVENT	Testing
LOCATION	MB Models Raceway
RACE RESULT	
QUALIFYING POSITION	
FASTEST LAP TIME	

NOTES

TRACK CONDITIONS

GRIP LEVEL	High ☐	Medium ■	Low ☐
TYPE	Tight ☐	Mixed ■	Open ☐
SURFACE	Carpet		
CONDITION	Smooth ☐	Bumpy ■	
TRACK DIMENSIONS			
TEMPERATURE	°C		°F

TYRES AND ADDITIVE

	Front		Rear	
COMPOUND	JT32FJ		JT30RJ	
FOAM DIAMETER	41.5	mm	43.0	mm
TYRE ADDITIVE	Blue		Blue	
ADDITIVE TIME	8	minutes	30	minutes
ADDITIVE COVERAGE	60	%	100	%
SIDEWALL GLUE	■		☐	

MOTOR AND GEARING

MOTOR	6.5t
MOTOR OPTIONS	
ROTOR DIAMETER	
TIMING	
SPUR GEAR SIZE	88 teeth
PINION SIZE	
ROLLOUT	mm / rev

ELECTRICS AND BODYSHELL

BODYSHELL	006	HEIGHT	5 mm
E.S.C	Hobbywing XR10 1S		
SERVO	Sanwa SRG-HR Mini Digital Servo		
RECEIVER	Sanwa Rx-481		
LiPo	Fantom 7800mah 100C		

FRONT

CAMBER	1.0		degrees
RIDE HEIGHT	3.2		mm
RIDE HEIGHT SPACER	1.0mm ☐	1.5mm ■	2mm ☐
TOE OUT	0.5		degrees/side
DAMPING	15,000		cSt
DROOP	1.0		mm
FRONT END BRACE	O-ring ■	Solid ☐	Removed ☐

STATIC CASTER

	FRONT	REAR	STATIC CASTER
☐	1.5mm	0mm	2.5°
☐	1mm	0.5mm	4.0° (kit)
■	0.5mm	1mm	6.0°
☐	0mm	1.5mm	7.5°



UPPER ARM LENGTH



REACTIVE CASTER



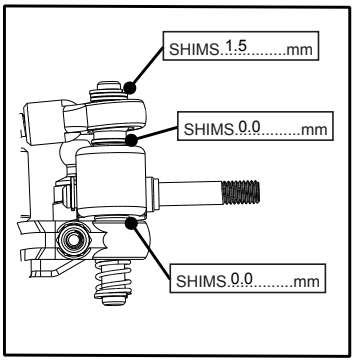



FRONT TRACK WIDTH ADJUSTMENT

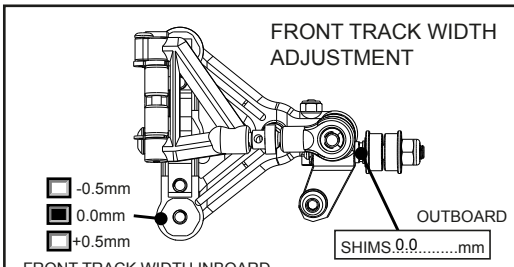

FRONT SPRINGS

- ☐ SUPER SOFT - U7013
- ☐ RED - U7015
- ■ YELLOW - U7016
- ☐ BLUE - U7014
- ☐ SOFT - U7012
- ☐ MEDIUM SOFT - U7011
- ☐ MEDIUM - U7009
- ☐ HARD - U7010

REAR

RIDE HEIGHT	3.4	mm
ROLL DAMPING	12,000	cSt
BUMP DAMPING	30,000	cSt
DROOP	1.6	mm
ROLL CENTRE SHIFT	KIT ■ +2.5mm ☐ ..... mm ☐	
ANTI SQUAT	KIT ■ ANTI SQUAT ☐ horizontal pod base	
DIFF PRELOAD	360° KIT ■ ..... ° ☐	

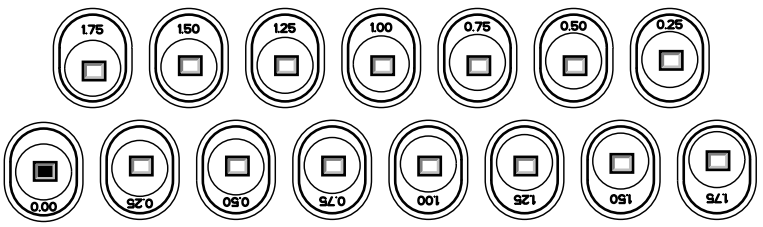

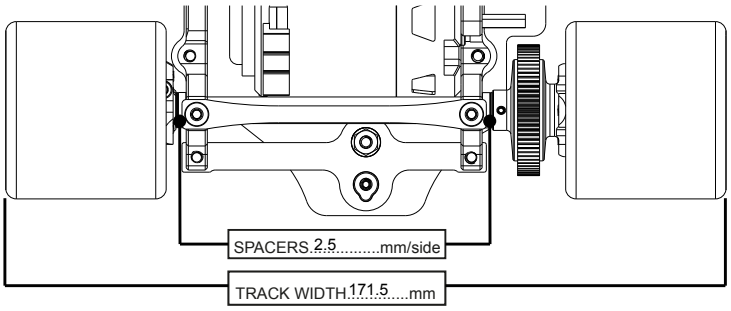

ROLL SPRINGS (SIDE)

SOFTER			HARDER
U4838 BLACK ■	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ☐

BUMP SPRING (CENTRE)

SOFTER			HARDER
U4838 BLACK ☐	U4839 SILVER ☐	U4840 GOLD ☐	U4841 NICKEL ■